

PanoDome 



360°

Panorama Live Video


Hi Sensitivity Tri-Microphone

Surround Speaker

Quick Start Guide


OPCOM PanoDome®

Parts List

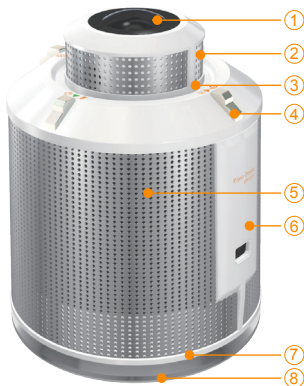

Part	Description
1. Camera	8-Mega pixel 360°surround camera for conference call
2. Three way microphones	8-Mega pixel 360°surround camera for conference call
3. LED light	Power on: Green light
4. Function Button	Four function buttons for system turn on/off , volume+/-, Mic mute.
5. Speaker	3W loud speaker
6. System In Port	System In Port is for PanoDome system cable to connect to Host PC as USB 3.0 of a camera, a microphone, a speaker, and a DC Jack for DV 5.0V power source.and a DC Jack for DV 5.0V power source.
7. Powerful Magnet	Stick stably on metal materials of table or wall for operating in vertical(360°) or horizontal way(200°) easily.
8. Wheel base	360 degree freely wheeling base

Hard Key Definition

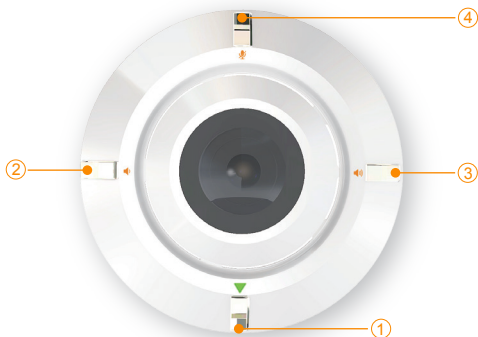

Button	Icon	Function	Operation
1	▼	System Power On / Off	0.5sec
2	🔊-	Volume -	0.5sec
3	🔊+	Volume +	0.5sec
4	🎤/	Microphone Mute	0.5sec



Package Contents

1



OPL403

2



System Cable

3



PanoDome Application
USB Flash Drive

4



DC 5V Power Adaptor

5



Base Plate

6



Quick Start Guide



User Manual



Safety & Placement



Children prohibition



No fire / chemicals



No humid



Installation & Operation



此為示意圖未確認

Please Scan the QR Code to See the Assembly Video.




Step1

Using OPCOM USB flash drive insert PanoDome application.




Step2

Connect PanoDome to other device (Speaker, Microphone, Micro USB and USB3.0)

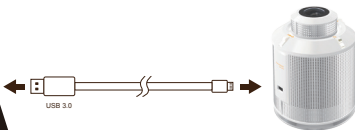


Installation & Operation

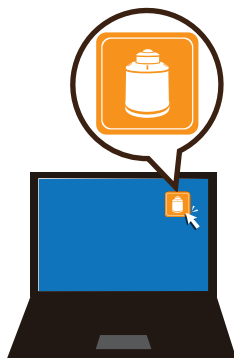

Step3

Start PanoDome application :

Double click PanoDome icon then you will see PanoDome application window.



Power OFF : Long press power button.



Application Functions



Full Screen



Zoom in 1 Time



Zoom in 2 Time



Zoom in 3 Time



Zoom in 4 Time



Move up



Move down



Move left



Move right



3 mode can select:
Auto mode
Panaorama view 360D
Side view 200D




Zoom In



Zoom Out




Recommended Usage Areas

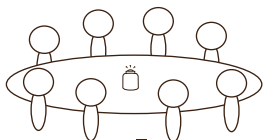


Panorama view 360°

Dewarp



B.

Side View 200°: Hook the Base Plate on the wall in the front of conference table.

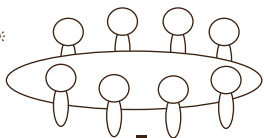

Side view 200°

Side



Production Spec

Model No.**OPL403**

Camera

8Mega Pixels , 2400p15 , 1200p30

Resolution

Focus Range: 50cm~Infinity center 650+ TV Line

Speaker and

Microphone

- 3W speaker 360° surrounding voice
- 3 pcs Microphones High sensitivity (-32db) to cover 360° range
- Echo Cancellation design
- Noise Reduction design

Video Compression

High quality MJPEG, YUV422

PanoDome 360

Window PC driver

Window XP above PC
4G above DDR SDRAM
360° 2P Panoramic view
360° 1P zoom view (X1-X4), PTZ
200° wall view
De-warp with Skype link video sharing

Output

USB 3.0 UVC class

Power Input

USB 3.0 cable (with optional DC jack)

Dimension

3.4" (D) x 4.3"(H)

Weight

570 g

