

PanoDome 



360°

Panorama Live Video

Quick Start Guide


OPCOM PanoDome®






Parts List

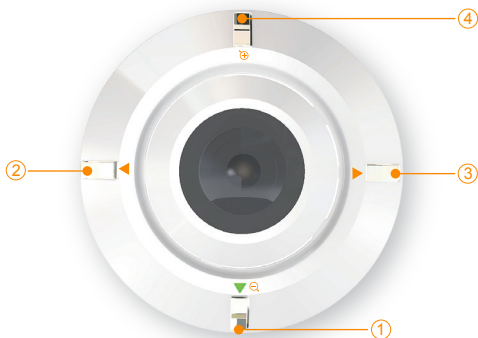

Part	Description
1. Camera	8-Mega pixel 360°surround camera for conference call
2. USB3.0	USB3.0 port
3. Wheel base	360 degree freely wheeling base



Hard Key Definition

Button	Icon	Function	Operation
1	 	Power On / Off Zoom -	2sec Short Press
2		Turn Left	Short Press
3		Turn Right	Short Press
4		Zoom +	Short Press



Package Contents

1



OPL403M

2



System Cable

3



PanoDome Application
USB Flash Drive

4



Base Plate

5



Quick Start Guide



User Manual



Safety & Placement



Children prohibition



No fire / chemicals



No humid



Installation & Operation



此為示意圖未確認

Please Scan the QR Code to See the Assembly Video.




Step1

Using OPCOM USB flash drive insert PanoDome application.




Step2

Connect PanoDome to other device (Speaker, Microphone, Micro USB and USB3.0)




Installation & Operation

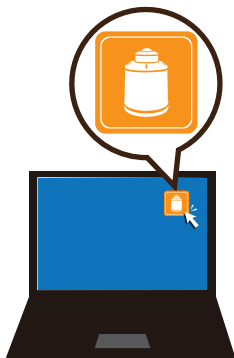

Step3

Start PanoDome application :

Double click PanoDome icon then you will see PanoDome application window.



Power OFF : Long press power button.



Application Functions

 Full Screen

 Zoom in 1 Time

 Zoom in 2 Time

 Zoom in 3 Time

 Zoom in 4 Time

 Move up

 Move down


 Move left

 Move right




3 mode can select:
Auto mode
Panaorama view 360D
Side view 200D

 Zoom In

 Zoom Out




Recommended Usage Areas




Panorama view 360°

Dewarp



B.

Side View 200°: Hook the Base Plate on the wall in the front of conference table.



Side view 200°

Side



Production Spec

Model No.	OPL403M
Camera	360°x 50° Panorama view 200°x 112° Wall view Focus Range: 60cm~Infinity
Resolution	H.264, MJPEG
Video Compression	8X digital zoom / X2 HD zoom
PanoDome 360 Window PC driver	Window XP above PC 4G above DDR SDRAM 360° 2P Panorama view 360° 1P zoom view (X1-X4), PTZ 200°wall view De-warp with Skype link video sharing
Output	USB 3.0 UVC class
Power Input	USB 3.0 cable (with optional DC jack)
Dimension	3.4" (D) x 2.5"(H)
Weight	400 g

